


**A / TOP**

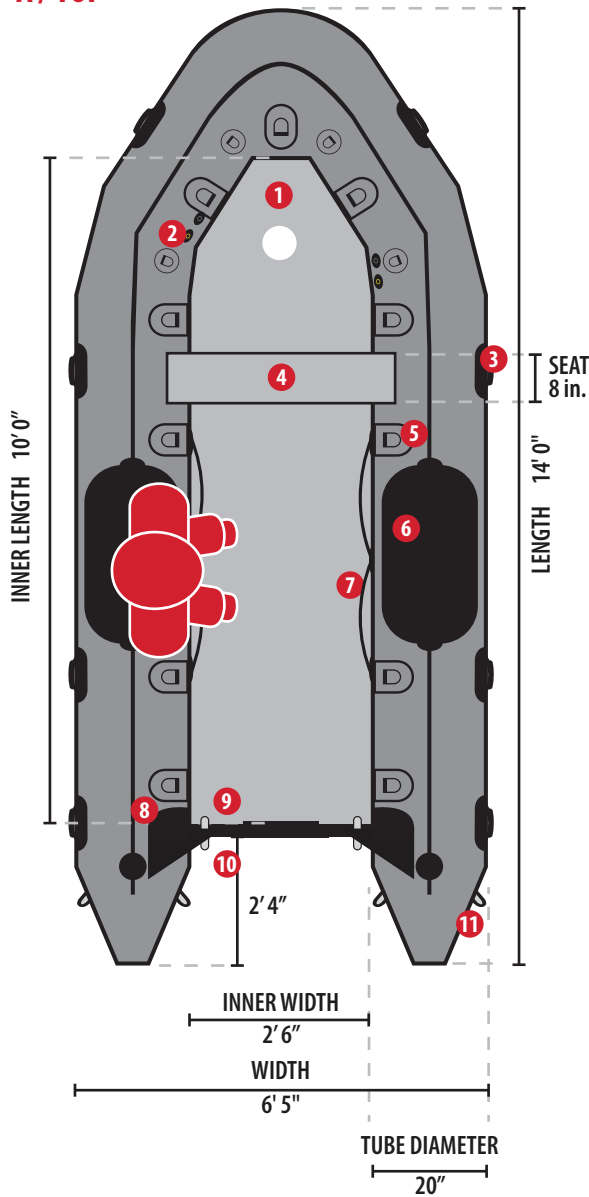


**SPECIFICATIONS**

Weight capacity: 8 persons / 2,395 lbs.  
 Max HP: 30 HP / 165 lbs / Short shaft (15")  
 Hull weight: 253 lbs.  
 Air chambers: 5 + keel  
 Fabric: Hypertex, polyester, 1.5 mm. dual coated material  
 Factory warranty: 3 years recreational / 1 year commercial


**# SEC FEATURES**

- 1.- A Non-skid air floor
- 2.- A Inflation and over inflation valves (One for each air chamber)
- 3.- A 6 carry handles, non slip design
- 4.- A 1 seat (1 positions)
- 5.- A 15 interior tie down D-rings (Stainless steel)
- 6.- A Dive patch
- 7.- A Interior/Exterior lifelines (Peripheral)
- 8.- A Reinforcement on tube transom attachments
- 9.- A Interior transom lifting rings (Stainless steel)
- 10.- A Transom eyes
- 11.- A Two large D-rings on rear tubes (Stainless steel)
- 12.- B Interior aluminum engine mounting plate
- 13.- B Marine plywood transom
- 14.- B Standard self bailer with plug (Pop-up design)
- 15.- C All around rub strake, flat profile, black
- 16.- C Bow handle (Stainless)
- 17.- C Two large tow rings on bow (Stainless steel)
- 18.- C Rubbing strakes for beaching on keel


**B / BACK**

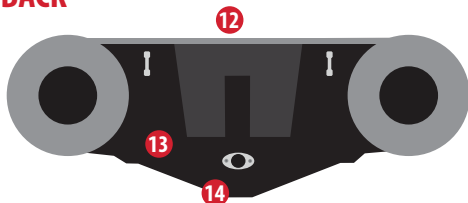

**C / SIDE**

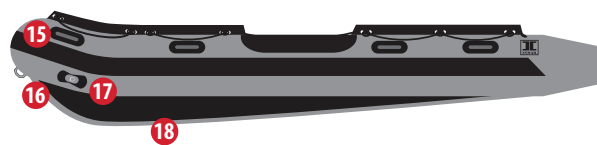

**ACCESSORIES**

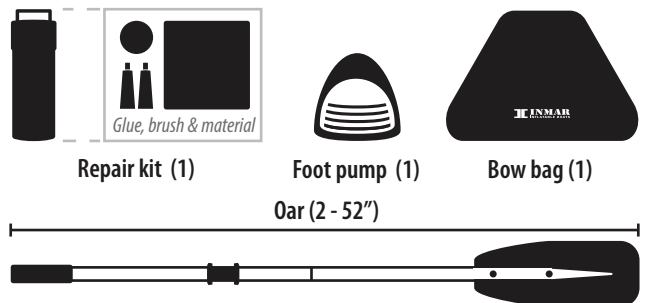

**SHIPPING INFORMATION**




**BOAT**

- Package dimensions: 58x32x22 (0.26 cbm.)
- Package weight: 274 lbs.

**OPTIONAL EQUIPMENT:**

- Quick-Fill field inflation system (SCUBA or SCBA)
- Scuppers set (High volume water drainage)
- Solas reflective panels (High night visibility)

**AIR FLOOR**

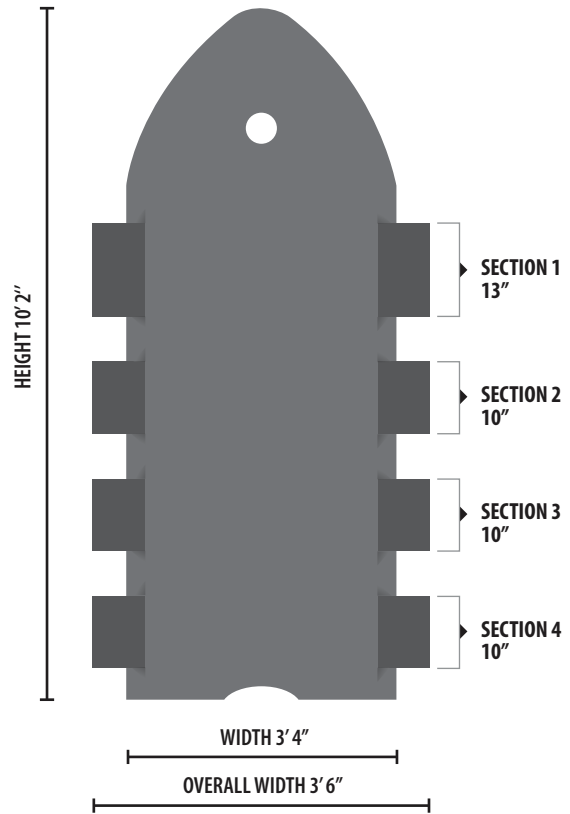

**CORRECT LOCKED POSITION**

- SECTIONS
- 1.- Stringers
  - 2.- Aluminum section

